


# BLUEBERRY HF

## RFID in your pocket



- RFID reader and writer**
- USB interface - Bluetooth 2.1+ EDR**
- SPP and HID (Keyboard Emulation) profiles**
- Automatic ID reading**
- Output ASCII / HEX with prefix and suffix**
- Battery life up to 15000 readings**

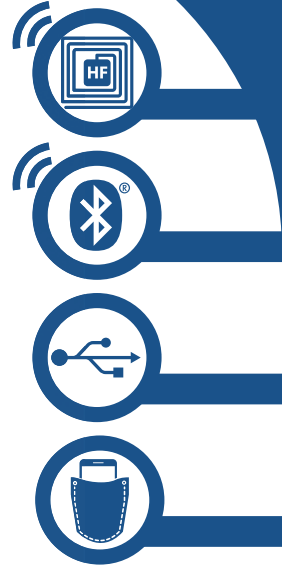

BlueBerry HF is an RFID key fob reader capable of reading an HF RFID tag and transmit it via Bluetooth to any device equipped with that interface.

BlueBerry HF was created based on the premise that most people usually keep a mobile phone and a set of keys in their pockets. The idea of creating a small, easy-to-use device, the size of a key ring, capable of reading an RFID tag by pressing one single button, and transmit read data to the mobile phone or to the Smartphone we always keep with us started from this premise.

The device has a reading distance of 6 cm (depending on the used tag).



BlueBerry supports both SPP and HID (optional) Bluetooth profiles. The HID profile allows to transfer in keyboard emulation mode the acquired informations to mobile devices equipped with any operative system as iOS (iPad, iPhone, iPod Touch), Android, BlackBerry, Symbian and Windows Mobile, etc...

In the same time BlueBerry is an easy method to integrate the RFID communication system on devices as Netbook, Notebook, PC etc.. that are equipped with operative system as Windows XP, Vista, Windows 7, Linux, Mac OS.

The single communication protocol, integrated in all TERTIUM Technology products, makes it easier to develop and project an application software able to manage all the functionalities of the devices. The configuration software, supplied with the product, allows to set the major functionalities as, for instance, the automatic scanning or the conversion of the read data in ASCII format.











All high-level operations such as information processing, visual display, transmission via text message, e-mail or directly on server via GPRS are devolved to the device BlueBerry will interface with.

Additionally, BlueBerry HF can operate as a normal table RFID reader by simply connecting it to a PC via a USB cable.



# BLUEBERRY HF



	<b>MAN/MACHINE INT</b>	1 function key for RFID read activation, Multitone Beeper, 2 LED for device operation signaling
	<b>INTERNAL DEVICES</b>	Frequency: 13.56 MHz Power: 200 mW Standard: ISO 15693, ISO 14443-A (only reading ID) Read range: 6 cm (*) <b>Embedded antenna</b>
	<b>INTERFACES</b>	Micro USB type B, Bluetooth Class 2 V2.0 (HID version with Bluetooth Class 2 V2.1+ EDR)
	<b>OS COMPATIBILITY</b>	<b>Bluetooth SPP Profile :</b> Windows XP, Windows Vista, Windows 7, Windows Mobile , OSX, Linux, Android, RIM, Symbian <b>Bluetooth HID Profile (**):</b> iOS, Windows XP, Windows Vista, Windows 7, Windows Mobile , OSX, Linux, Android, RIM, Symbian
	<b>PROCESSOR</b>	Texas Instruments MSP430 (16 bit RISC a 16MHz)
	<b>POWER SUPPLY</b>	<b>USB powered:</b> 230mA peak @ 5Vdc (RF active full power), 30mA @ 5Vdc (idle mode) <b>Battery powered:</b> Li-Poly Battery 3.7Vdc 300mAh, rechargeable via micro USB Battery life 15000 reading, 24 h in idle mode
	<b>WORKING TEMPERATURE</b>	-10°C / 70°C
	<b>DIMENSION</b>	Width 6.8 cm – Height 4.2 cm – Depth 1.8 cm
	<b>WEIGHT</b>	30 g
	<b>PROTECTION DEGREE</b>	IP 54

(\*) depending on the TAG

(\*\*) available on request